


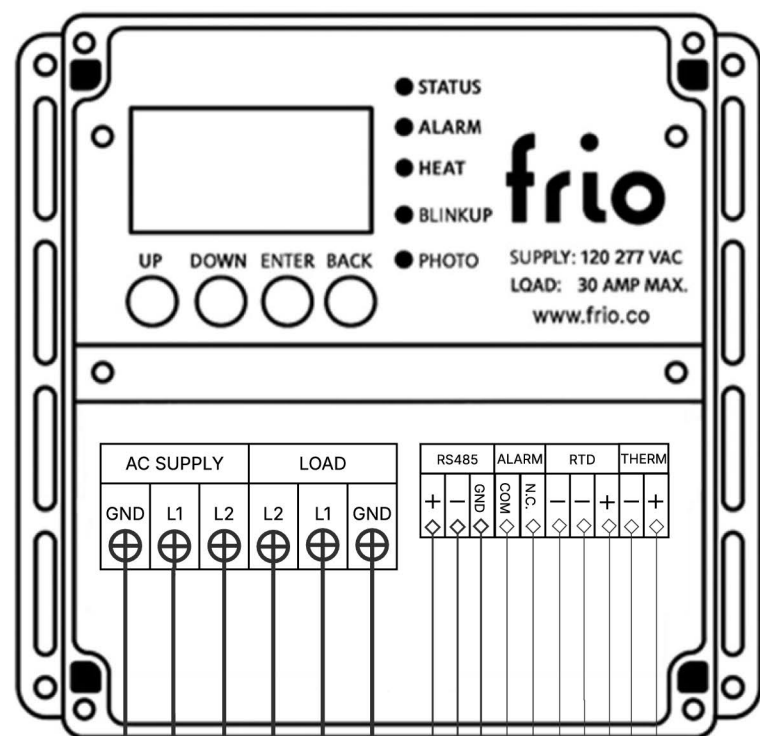

FRIO S1-A

THERMISTOR
10K FRIO THERMISTOR ONLY
(INCLUDED WITH S1 CONTROLLER)


RTD (PT100)
MUST BE PLATINUM 100 OHM

ALARM DRY-CONTACT
DRY-CONTACT IS NORMALLY
CLOSED AND OPENS ON ALARM

SHEILDED TWISTED PAIR
TO SM-JB-1

**CUSTOMER SUPPLIED
POWER**
120V, 208V, 240V OR 277V
DUAL POLE CONTACTOR

**TO HEATER OR
CONTACTOR PANEL**
CONNECT GROUND TO
HEAT TRACE GROUND
SHEATH

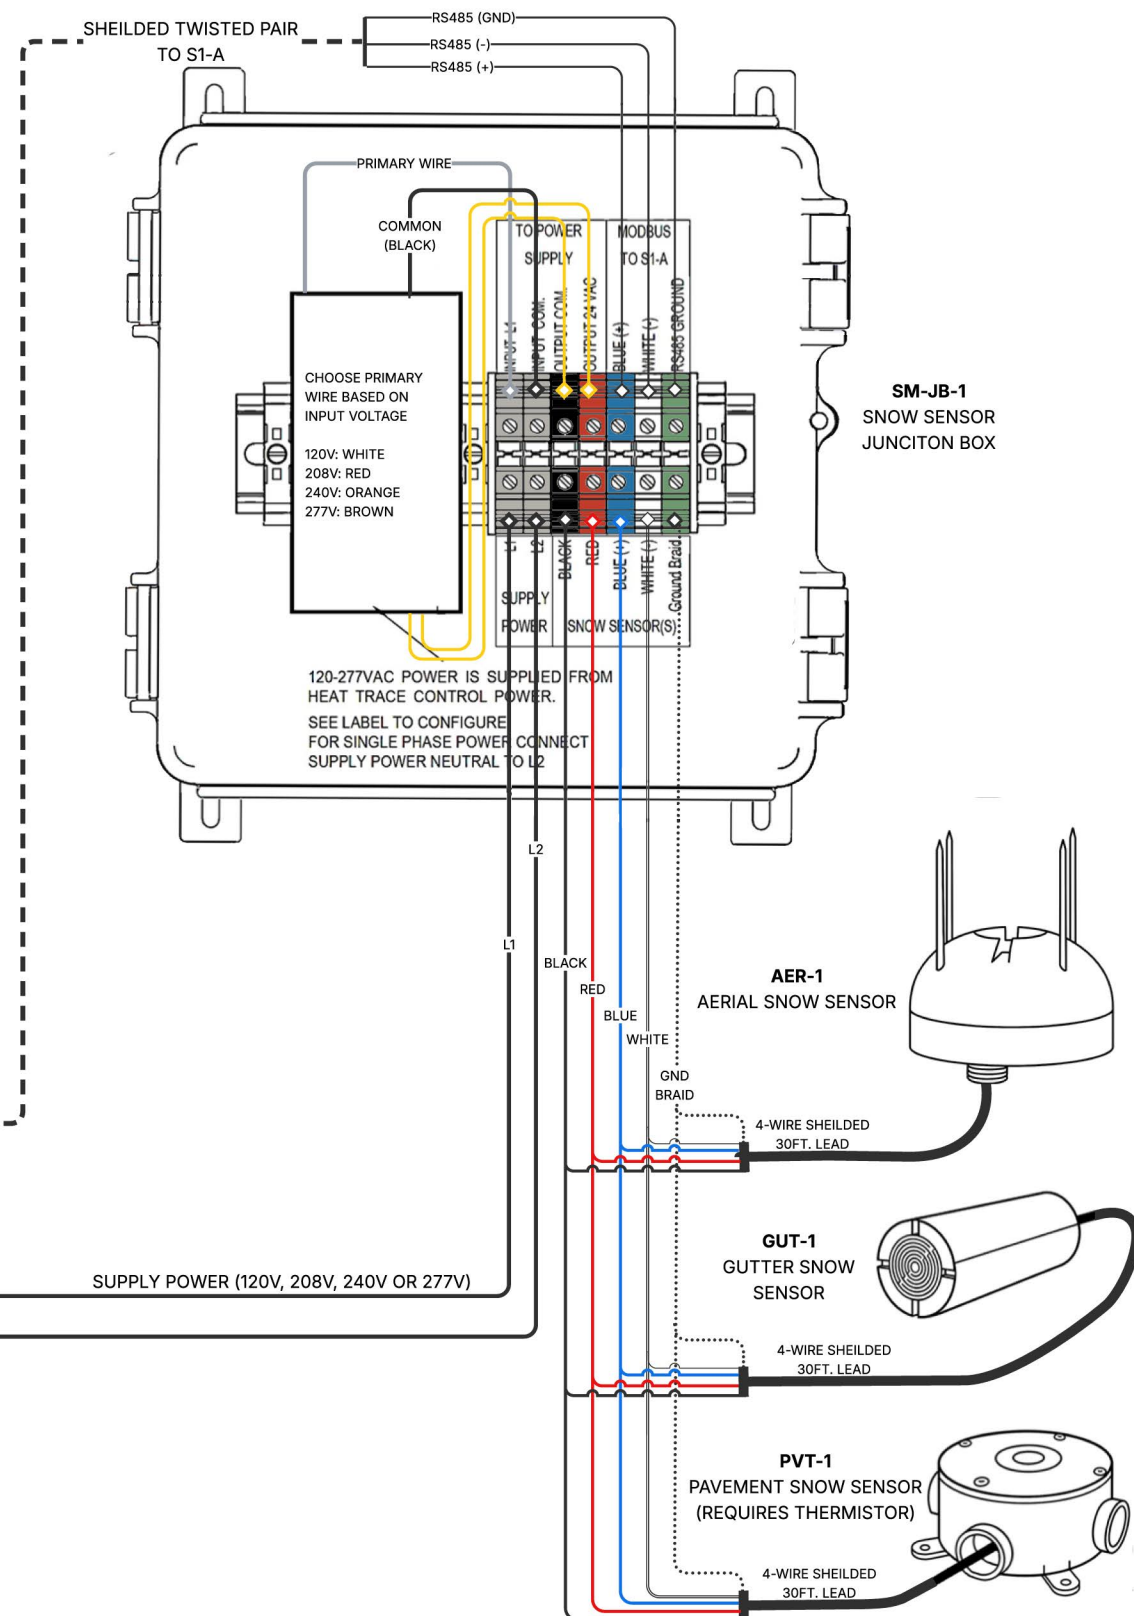

PROPERTY OF
FRIO CONTROLS

BROOKLYN, NY
(332) 278-2858
info@frio.co

ONE-LINE FRIO S1-A WITH SNOW SENSORS

DRAWN BY: T. KUSTER
DATE: 8/28/25
SHEET 1 of 1

REVISION: 0. PUBLISHED

NOTES:

frio