


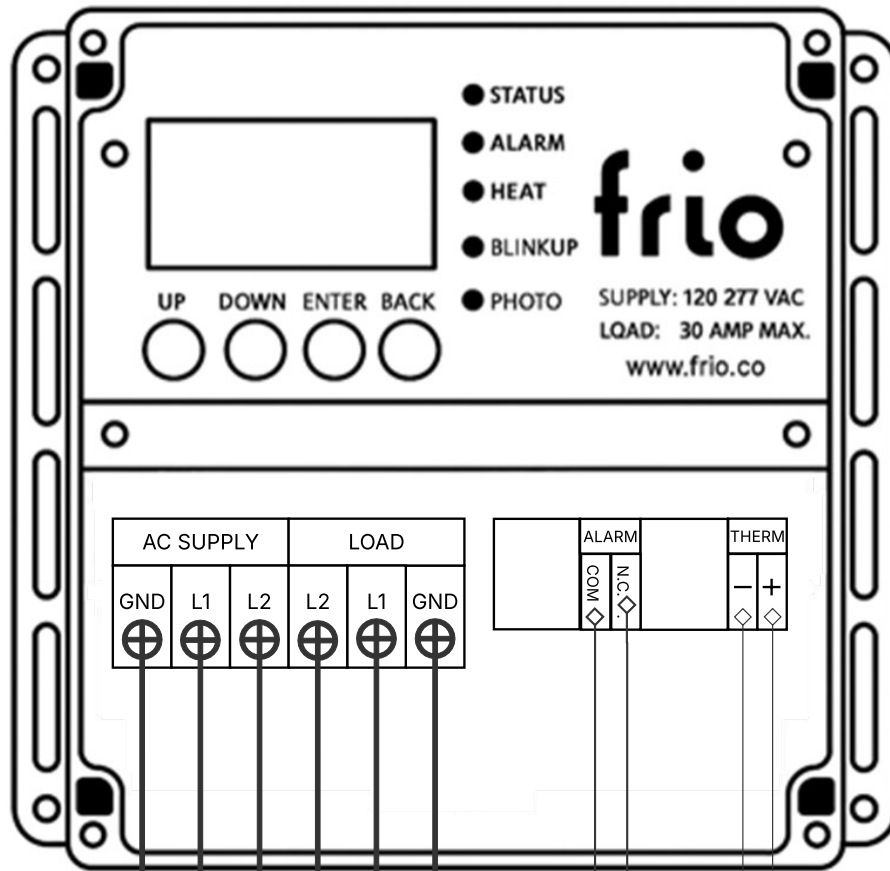

**CUSTOMER SUPPLIED
POWER**
120V, 208V, 240V OR 277V
DUAL POLE CONTACTOR

TO HEATER
CONNECT GROUND TO HEAT
TRACE GROUND SHEATH

THERMISTOR
10K FRIO THERMISTOR ONLY
(INCLUDED WITH S1 CONTROLLER)

ALARM DRY-CONTACT
DRY-CONTACT POINT IS NORMALLY
CLOSED AND WILL OPEN ON ALARM

PROPERTY OF
FRIO CONTROLS
BROOKLYN, NY
(332) 278-2858
info@frio.co

ONE-LINE FRIO S1-B

DRAWN BY: T. KUSTER
DATE: 8/28/25
SHEET 1 of 1

REVISION: 0. PUBLISHED

NOTES:

frio