



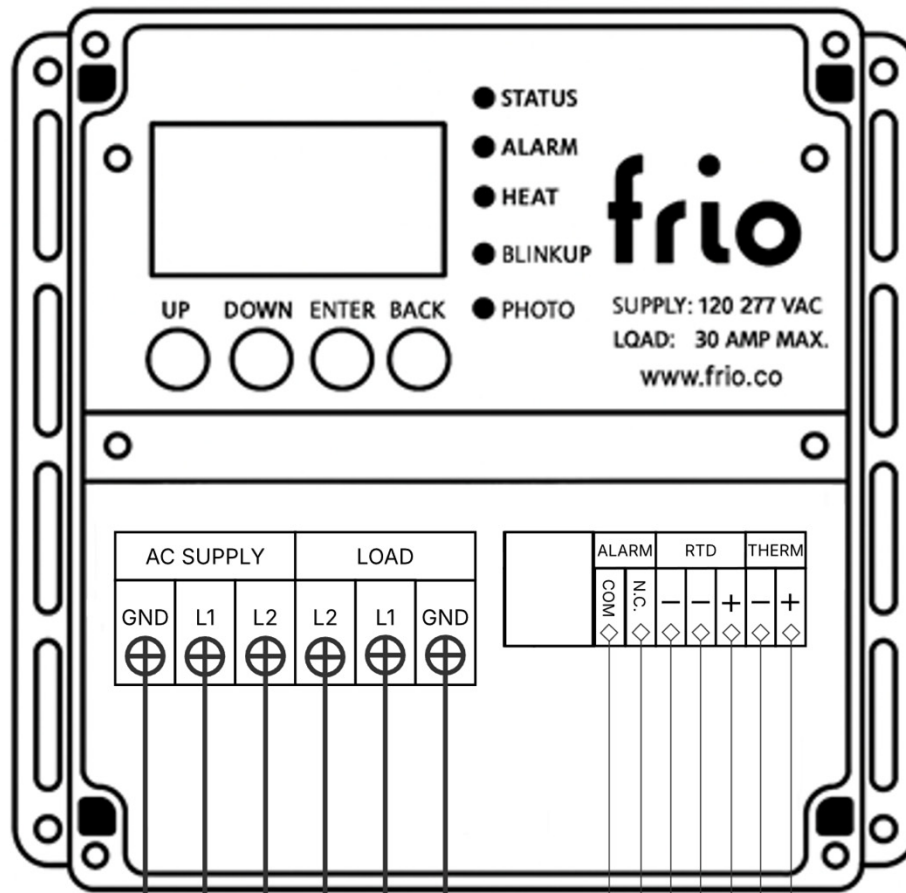


**CUSTOMER SUPPLIED
POWER**

120V, 208V, 240V OR 277V
DUAL POLE CONTACTOR




TO HEATER

CONNECT GROUND TO HEAT
TRACE GROUND SHEATH

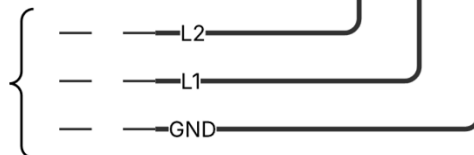

THERMISTOR

10K FRIO THERMISTOR ONLY
(INCLUDED WITH S1 CONTROLLER)




RTD

MUST BE PLATINUM 100 OHM
(PT100) RTD



ALARM DRY-CONTACT

DRY-CONTACT POINT IS NORMALLY
CLOSED AND WILL OPEN ON ALARM



PROPERTY OF
FRIO CONTROLS
BROOKLYN, NY
(332) 278-2858
info@frio.co

ONE-LINE FRIO S1-B

DRAWN BY: T. KUSTER
DATE: 8/31/26
SHEET 1 of 1

REVISION: 0. PUBLISHED

NOTES:

frio